

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2003-298756

(43)Date of publication of application : 17.10.2003

(51)Int.Cl. H04M 11/00
G08B 25/04
G08B 25/08

(21)Application number : 2002-097320

(71)Applicant : SOGO KEIBI HOSHO CO LTD

(22)Date of filing : 29.03.2002


(72)Inventor : MATSUBAYASHI TORU

(54) SYSTEM AND METHOD FOR MONITORING AND PROGRAM FOR CAUSING COMPUTER TO EXECUTE THE METHOD

(57)Abstract:

PROBLEM TO BE SOLVED: To sufficiently secure the security of a monitored area without declining such a convenience as a reduction in communication expense.

SOLUTION: A monitoring device 20 sets a mode by switching the mode to a data communication mode using a data communication band 1a, or a voice communication mode using a voice communication band 1b. Then the monitoring device 20 transmits an abnormality signal indicating that a status change is detected in a monitored area to a monitoring center 30 by using either the data communication band 1a or voice communication band 1b. In addition, the device 20 periodically transmits a fixed-time signal indicating that the abnormality signal can be transmitted to the monitoring center 30 by using either the data communication band 1a or voice communication band 1b in accordance with a set mode.

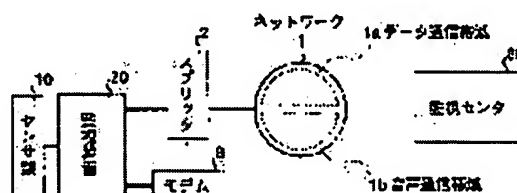

LEGAL STATUS

[Date of request for examination]

14.03.2005

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of

rejection]

[Date of requesting appeal against examiner's
decision of rejection]

[Date of extinction of right]